

**TORO**

# TORO® DINGO® TX 1300

COMPACT UTILITY LOADERS

Ideal for landscape, hardscape and tree care jobs, the TX 1300 brings a new combination of power, reach and convenient control to the Toro® Dingo® lineup. With a 37 hp Yanmar® Stage V diesel engine and 590 kg of rated operating capacity, it's the user-friendly workhorse you need to save time. The exclusive INTELESCOPE® loader arm with Smartload adds 67 cm of reach, and the telescoped hinge-pin height of 277 cm means you can lift loads up and over the side of a truck for maximum productivity. Plus, you can operate the Toro patented traction controls with one hand and thumb-controlled telescoping extension and auxiliary functions (in the loader arm control) with the other to pick, place and dump materials with ease all day long.

## FEATURES

### INTELESCOPE LOADER ARM


Featuring SmartLoad for a hinge-pin height of 277 cm which adds 67 cm of reach over other compact utility loaders

### QUICK COUPLER SYSTEM

Pressure relieving quick coupler system makes connection of attachments easier

### INTEGRATED AUXILIARY

Integrated auxiliary operation in loader arm control eliminates secondary hydraulic operation

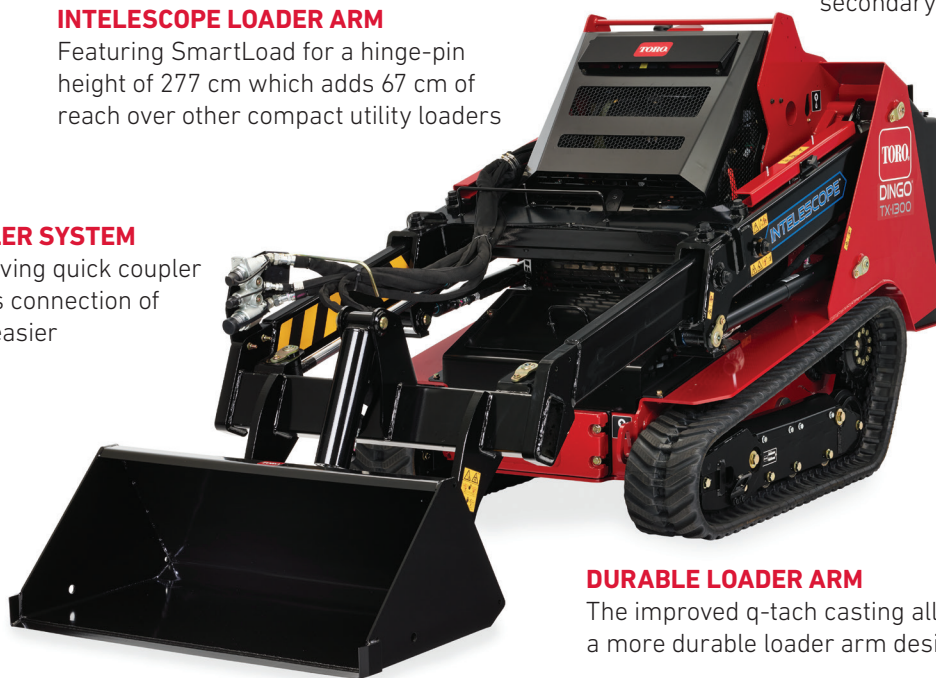

### DURABLE LOADER ARM

The improved q-tach casting allows for a more durable loader arm design



### AUXILIARY PEDAL

User friendly auxiliary pedal on an enlarged operator platform improves ease of engagement

# TORO® DINGO® TX 1300

## SPECIFICATIONS

		<b>DINGO TX 1300</b> (MODEL 22370)
<b>ENGINE</b>	Engine	27 kW (37 HP) Yanmar® diesel
	Air Filter	Remote dual element
	Cooling System	Combo downflow radiator and oil cooler, independent fuel cooler
	Fuel Tank	42 liters (11 gallons)
	Oil Capacity	4.7 liters (5 quarts)
<b>HYDRAULIC SYSTEM</b>	Hydraulic Pressure	3,200 PSI
	Hydraulic Flow	Traction: 13.4 gpm (each pump) Auxiliary: 14.3 gpm
	Reservoir Capacity	34.8 liters (9.2 gallons)
<b>TRACKS</b>	Standard	MERT track with "TF" style tread
	Traction	Dual hydrostatic pump
<b>DIMENSIONS</b>	Track Dimensions	322 cm x 23 cm (126.6" x 9.1")
	Wheelbase	99 cm (39")
	Ground Clearance	15 cm (5.9")
	Overall Dimensions (WxLxH) With Bucket	116.8 x 262 x 143.5 cm (46" x 103.1" x 56.5")
	Overall Dimensions (WxLxH) Without Bucket	116.8 x 215.6 x 143.5 cm (46" x 84.9" x 56.5")
	Maximum Operating Height	337.8 cm (133")
	Hinge Pin Height	227 cm (89.4") - retracted 277.4 cm (109.2") - extended
	Dump Height	230.3 cm (90.7") extended, 180 cm (70.9") retracted
	Dump Angle	38-degrees
	Reach - Fully Raised	67.8 cm (26.7")
	Ground Speed	7.6 km/h (4.7 mph)
	Weight	1,750 kg (3,858 lbs)
	Tip Capacity	1,685 kg (3,714 lbs)
Rated Operating Capacity (35% of Tip Capacity)*	590 kg (1,300 lbs) - retracted 280 kg (618 lbs) - extended	
Ground Pressure	5.5 PSI	

\*Per ISO 14397-1

Products depicted in this literature are for demonstration purposes only. Actual products offered for sale may vary in use, design, required attachments and safety features. We reserve the right to improve our products and make changes in specifications, designs and standard equipment without notice and without incurring obligation. See your dealer for details on all of our warranties. [toro.com/dingo](http://toro.com/dingo)



### toro.com

Worldwide Headquarters  
The Toro Company  
8111 Lyndale Ave. So.  
Bloomington, MN 55420 U.S.A.  
Phone: (1) 952 888 880

©2021 The Toro Company.  
All Rights Reserved.  
22-702-GB



facebook.com  
twitter.com/TheToroCompany  
youtube.com/ToroCompanyEurope



**Count on it.**